



2VREt45 300V

N38-A3

DATA SHEET

release. 0 - Revision 03-2015

Replace R10-31



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
400	50	143	0,33	-	2705	2675	68	L	-20°C / +70°C
400	60	200	0,36	-	3005	2950	70	L	-20°C / +70°C
400	50				1592 CFM				-4°F / 158°F
400	60				1768 CFM				-4°F / 158°F





dBA : free blowing

ErP 2013

OK

ErP 2015


OK

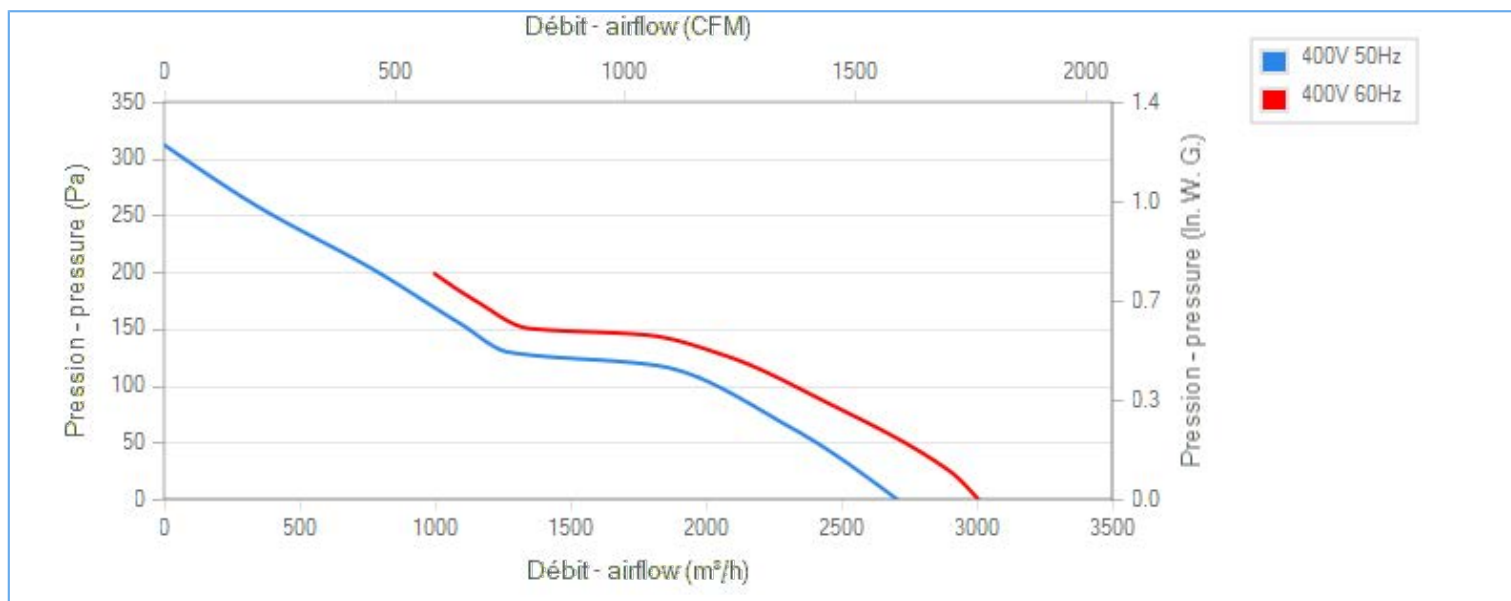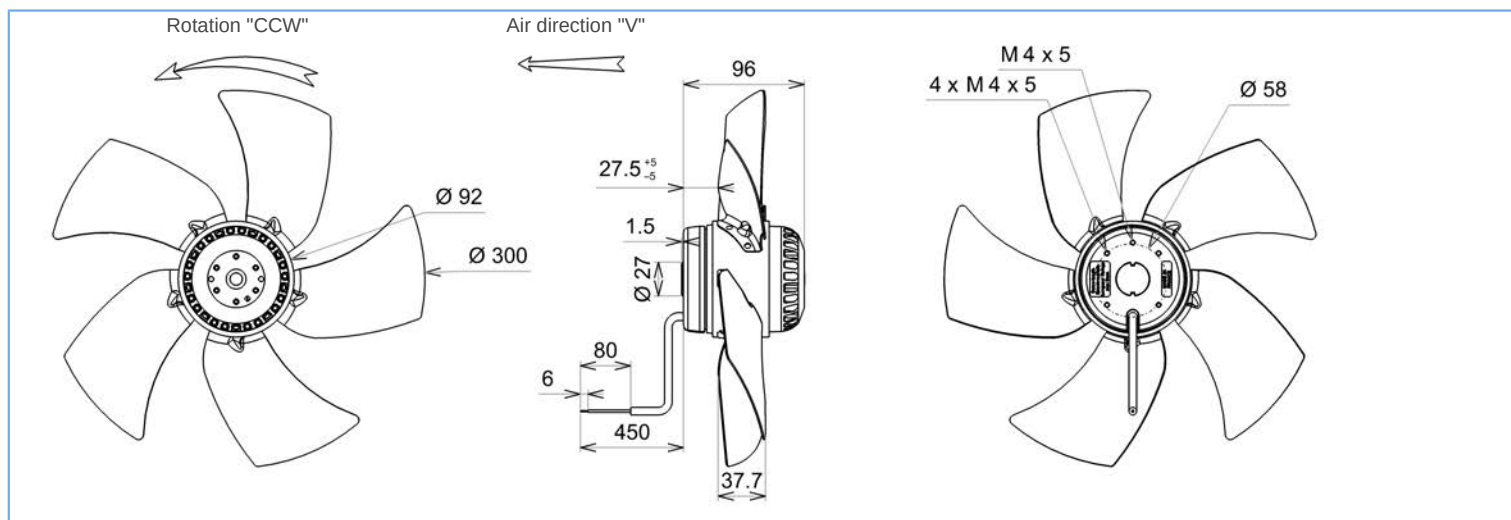

Tested with ECOFIT ring

Description

- .Weight : 2,9 Kg
- .Ball bearing
- .Insulation Class F
- .IP44 protection depending on installation and position as per EN60034-5
- .G6.3 balancing
- .Zinc coated impeller
- .Rotor and impeller : black paint



U = Black
V = Brown
W = Blue
PE = Green/yellow



2VREt45 300V

N38-A3

DATA SHEET

release. 0 - Revision 03-2015

Replace R10-31



Data in accordance to ErP directive

Voltage	400	V
Frequency	50	Hz
Power	0,193	kW ⁽¹⁾
Airflow	1826	m ³ /h ⁽¹⁾
Pressure	117	Pa ⁽¹⁾
Rotation speed	2504	RPM ⁽¹⁾
(1) at optimal efficiency point		

	Actual	Request 2013	Request 2015
Overall efficiency (η)	30,8	25,2	29,2
Efficiency grade	42	36	40
Installation category	A		
Efficiency category	static		
Variable speed drive	No		
Specific ratio	1,00		

Designed for regular application according ErP directive EU 2009/125/EC

Accessories

-
-
39658
09172

Measurement setup

16086 VIROLE V300 RONDE

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes

