


**"A08BF" SERIES COSTECH FANS IP55**

Description: **Axial fan a.c. 80x80x38mm**

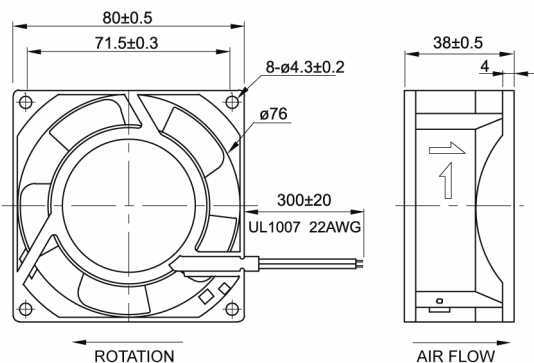

**Casing material:**  
**Impeller material**

Black varnished aluminum  
Black fibreglass reinforced plastic (PBT PC)  
UL 94V-0

**Protection degree:**

IP55, according to EN 60529 standard

**Fixing system:**

by No 4 M4 screws

**Motor protection:**

Impedance

**Storage temperature:**

from -40°C to +80°C

**Rated temperature range:**

from -40°C to +70°C

**Lifetime L10 at 40°C:**


over 40,000 h

**Electrical connection:**

2 leads 22AWG UL 1007, 300 mm long.

**Weight:**

0.28 kg

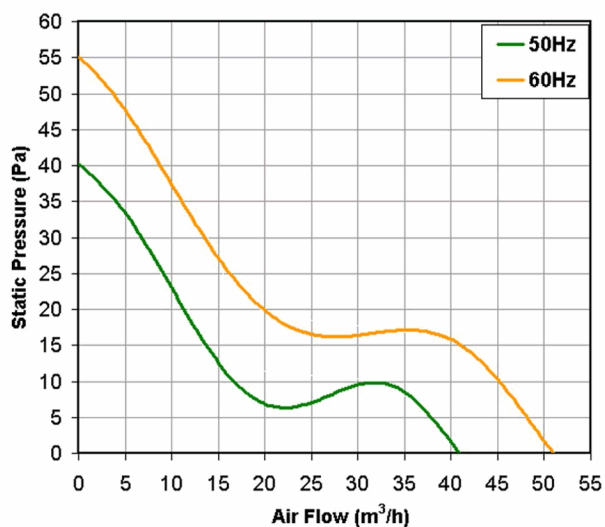

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
A08B12HWBFF0	Ball	115 V a.c.	50/60	0.140/0.120	14/12	41/51	40/55	32.0/36.0	2,500/3,000	CE
A08B23HWBFF0	Ball	230 V a.c.	50/60	0.070/0.060	14/12	41/51	40/55	32.0/36.0	2,500/3,000	CE