
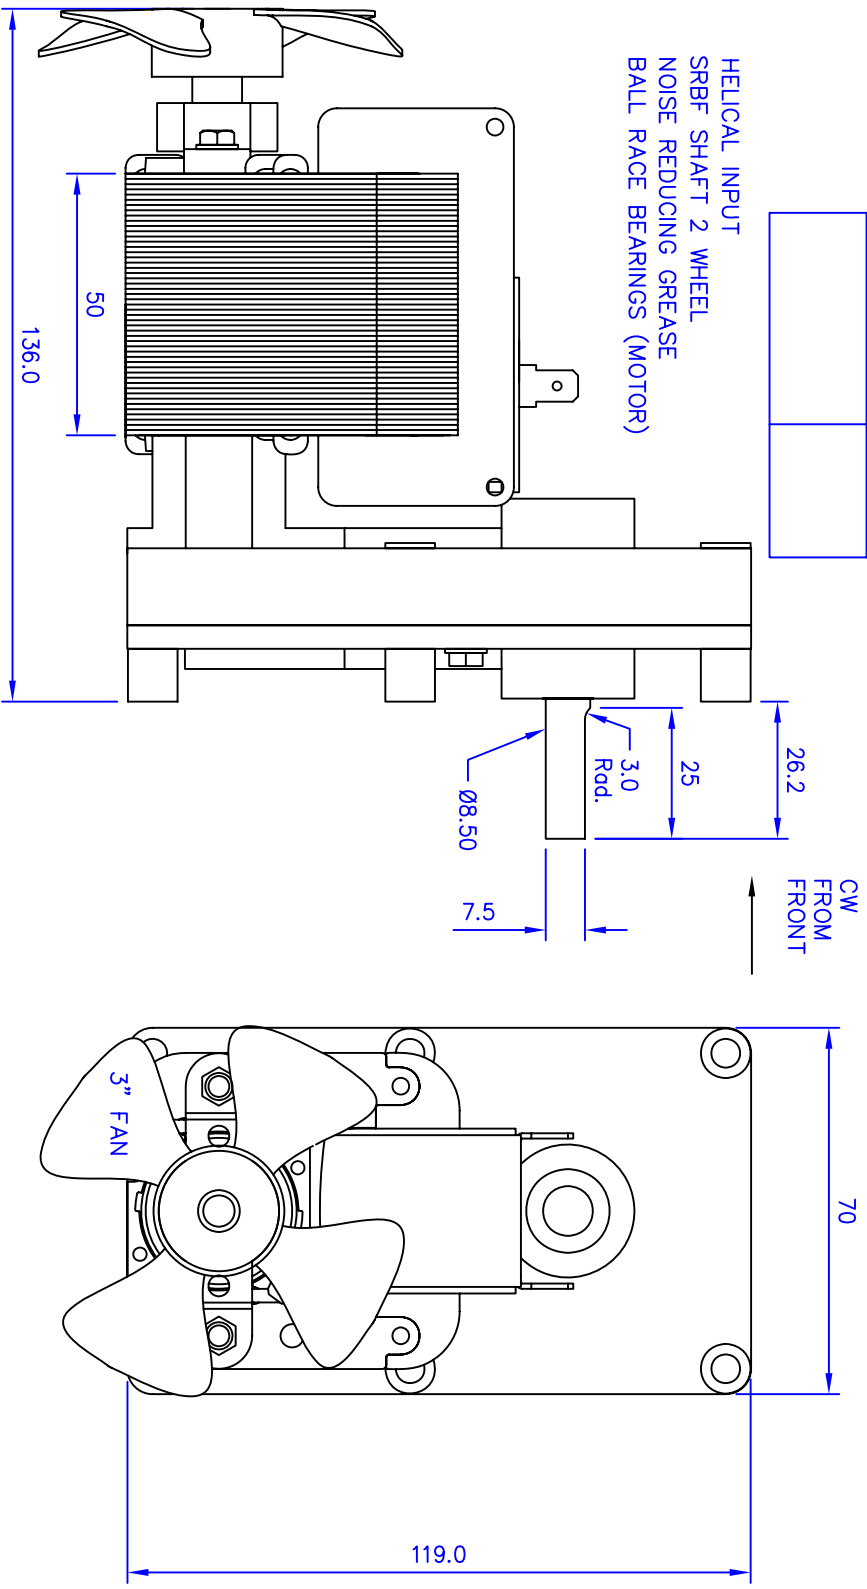


|           |      |
|-----------|------|
| APPROVED  |      |
| SIGNATURE | DATE |
|           |      |

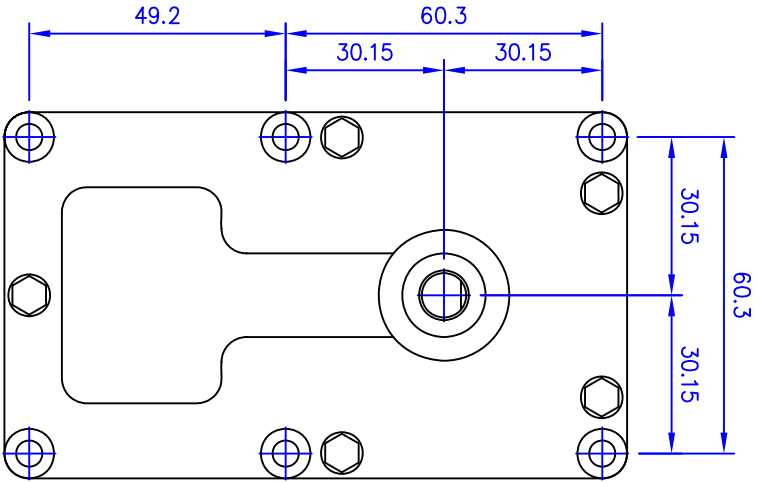

MOTOR SPEC

MEM 497 (230v 50Hz)  
 2.00" BOBBIN (NYLON – GLASS FILLED CLASS F)  
 SOLDERABLE POLYURETHANE WIRE (CLASS H, UL APPROVED)  
 125°C SELF-SETTING THERMOSTAT (UL APPROVED)  
 6.35mm MALE TAGS FITTED  
 COVER WITH GLASS CLOTH TAPE (CLASS F)

TECHNICAL DATA

INPUT POWER @ 230v 50Hz – 52WATTS  
 NOMINAL CURRENT @ 230v 50Hz – 0.48Amps  
 STALLED CURRENT @ 230v 50Hz – 0.73Amps  
 OUTPUT TORQUE @ 230v 50Hz – 30Nm

|                      |  |          |  |                      |  |
|----------------------|--|----------|--|----------------------|--|
| MELLOR ELECTRICS Ltd |  | APPROVED |  | CUSTOMER             |  |
| BLACKBURN ENGLAND    |  | DRAWN    |  | SOFTING ITALIA       |  |
| -                    |  | LC       |  | DESCRIPTION          |  |
| 01/05/09             |  | -        |  | T3 5.3 RPM 230v 50Hz |  |
| -                    |  | -        |  | PART No              |  |
| -                    |  | -        |  | FB1146               |  |